

FLIR A320 Tempscreen

P/N: 48201-1201

Copyright

© 2019, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 48201-1201

Commit: 35207

Language: en-US

Modified: 2016-04-27

Formatted: 2019-11-11

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The FLIR A320 Tempscreen is a camera preconfigured to work well in applications where you want to find temperature deviations in a population of people, utilizing difference temperature alarms with a dynamically updated reference temperature.

In addition, the FLIR A320 Tempscreen offers an affordable and accurate temperature measurement solution for anyone who needs to solve problems that need built in "smartness" such as analysis, alarm functionality and autonomous communication using standard protocols. The FLIR A320 Tempscreen also has all the necessary features and functions to build distributed single- or multi-camera solutions utilizing standard Ethernet hardware and software protocols.

Key features:

- Screening: difference temperature alarm with a dynamic updated reference temperature (visualized by the isotherm).
- Built-in extensive analysis functionality.
- Extensive alarm functionality, as a function of analysis and more.
- On schedule: file sending (FTP) or e-mail (SMTP) of analysis results or images.
- On alarms: file sending (FTP) or e-mail (SMTP) of analysis results or images.
- MPEG-4 streaming.
- PoE (Power over Ethernet).
- Built-in web server.
- General purpose I/O.
- 100 Mbps Ethernet (100 m cable, wireless, fiber, etc.).
- Synchronization through SNTP.
- Composite video output.
- Multi-camera utility software: FLIR IP Config and FLIR IR Monitor included.
- Open and well-described TCP/IP protocol for control and set-up.
- 16-bit 320 × 240 pixel images semi-real time, signal and temperature linear.
- Lenses: 25° included, 15° and 45° optional.

Typical applications:

- Safety with temperature alarms (multi-camera applications), fire prevention, critical vessel monitoring, and power utility asset management.
- Volume-oriented industrial control (multi-camera installation is possible).

Imaging and optical data

IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	< 0.05°C @ +30°C (+86°F) / 50 mK
Field of view (FOV)	25° × 18.8°
Minimum focus distance	0.4 m (1.31 ft.)
Focal length	18 mm (0.7 in.)
Spatial resolution (IFOV)	1.36 mrad
Lens identification	Automatic
F-number	1.3
Image frequency	30 Hz



FLIR A320 Tempscreen

P/N: 48201-1201

© 2019, FLIR Systems, Inc.


#48201-1201; r. 35207; en-US

Imaging and optical data	
Focus	Automatic or manual (built in motor)
Zoom	1–8× continuous, digital, interpolating zooming on images
Detector data	
Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	7.5–13 µm
Detector pitch	25 µm
Detector time constant	Typical 12 ms
Measurement	
Object temperature range	<ul style="list-style-type: none">–20 to +120°C (–4 to +248°F)0 to +350°C (+32 to +662°F)
Accuracy	±2°C (±3.6°F) or ±2% of reading
Measurement analysis	
Spotmeter	4
Area	4 boxes with max./min./average/position
Isotherm	1 with above/below/interval
Measurement option	Measurement Mask Filter Schedule response: File sending (ftp), email (SMTP)
Difference temperature	Delta temperature between measurement functions or reference temperature
Reference temperature	Manually set or captured from any measurement function
Atmospheric transmission correction	Automatic, based on inputs for distance, atmospheric temperature and relative humidity
Optics transmission correction	Automatic, based on signals from internal sensors
Emissivity correction	Variable from 0.01 to 1.0
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
External optics/windows correction	Automatic, based on input of optics/window transmission and temperature
Measurement corrections	Global and individual object parameters
Alarm	
Alarm functions	6 automatic alarms on any selected measurement function, Digital In, Camera temperature, timer
Screening	Difference temperature alarm with dynamic updated reference temperature (visualized by the isotherm)
Alarm output	Digital Out, log, store image, file sending (ftp), email (SMTP), notification
Set-up	
Color palettes	Color palettes (BW, BW inv, Iron, Rain)
Set-up commands	Date/time, Temperature (°C/°F)

P/N: 48201-1201

© 2019, FLIR Systems, Inc.

#48201-1201; r. 35207; en-US

Storage of images	
Storage media	Built-in memory for image storage
File formats	Standard JPEG, 16-bit measurement data included
Ethernet	
Ethernet	Control, result and image
Ethernet, type	100 Mbps
Ethernet, standard	IEEE 802.3
Ethernet, connector type	RJ-45
Ethernet, communication	TCP/IP socket-based FLIR proprietary
Ethernet, video streaming	MPEG-4, ISO/IEC 14496-1 MPEG-4 ASP@L5
Ethernet, image streaming	16-bit 320 × 240 pixels <ul style="list-style-type: none"> • Signal linear • Temperature linear • Radiometric
Ethernet, power	Power over Ethernet, PoE IEEE 802.3af class 0. <div>  NOTE In cameras manufactured before 2013, due to an error in the implementation of power over Ethernet, in some rare cases the camera will not be powered. In such cases, power the camera using the external power cable, or modify the camera according to Service bulletin SB14-006. For modification, please contact your local service department. See http://support.flir.com/service for contact details. </div>
Ethernet, protocols	TCP, UDP, SNTP, RTSP, RTP, HTTP, ICMP, IGMP, ftp, SMTP, SMB (CIFS), DHCP, MDNS (Bonjour), uPnP
Digital input/output	
Digital input, purpose	Image tag (start/stop/general), Input ext. device (programmatically read)
Digital input	2 opto-isolated, 0–1.5 V = low, 3–25 V = high
Digital output, purpose	As function of ALARM, Output to ext. device (programmatically set)
Digital output	2 opto-isolated, ON = supply (max. 100 mA), OFF = open
Digital I/O, isolation voltage	500 VRMS
Digital I/O, supply voltage	6–24 VDC, max. 200 mA
Digital I/O, connector type	6-pole jackable screw terminal
Composite video	
Video out	Composite video output, PAL and NTSC compatible
Video, standard	CVBS (ITU-R-BT.470 PAL/SMPTE 170M NTSC)
Video, connector type	Standard BNC connector

P/N: 48201-1201

© 2019, FLIR Systems, Inc.

#48201-1201; r. 35207; en-US

Power system	
External power operation	12/24 VDC, 24 W absolute max.
External power, connector type	2-pole jackable screw terminal
Voltage	Allowed range 10–30 VDC
Environmental data	
Operating temperature range	–15°C to +50°C (+5°F to +122°F)
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25°C to +40°C (+77°F to +104°F)
EMC	<ul style="list-style-type: none"> EN 61000-6-2:2001 (Immunity) EN 61000-6-3:2001 (Emission) FCC 47 CFR Part 15 Class B (Emission)
Encapsulation	IP 40 (IEC 60529)
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Physical data	
Weight	0.7 kg (1.54 lb.)
Camera size (L × W × H)	170 × 70 × 70 mm (6.7 × 2.8 × 2.8 in.)
Tripod mounting	UNC ¼"-20 (on three sides)
Base mounting	2 × M4 thread mounting holes (on three sides)
Housing material	Aluminum
Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> Infrared camera with lens Ethernet cable Mains cable Power cable, pig-tailed Power supply Printed documentation Utility CD-ROM
Packaging, weight	
Packaging, size	495 × 370 × 192 mm (19.5 × 14.6 × 7.6 in.)
EAN-13	7332558003398
UPC-12	845188003142
Country of origin	Sweden

Supplies & accessories:

- 1196961; IR lens, f=30 mm, 15° incl. case
- 1196960; IR lens, f=10 mm, 45° incl. case
- T197407; IR lens, 76 mm (6°) with case and mounting support for A3xx, A3xxsc
- T197411; IR lens, 4 mm (90°) with case and mounting support for A3xx, A3xxsc
- T197415; Close-up 1× (25 µm) incl. case and mounting support for A3xx, A3xxsc
- T129252; Special temperature range -20 to +700 deg C
- T129253; Special temperature range -20 to +500 deg C
- T129254; High temperature measurement option -20 to +2000 deg C
- T130151; Special temperature range -20 to +2000 deg C
- T130152; Special temperature range +200 to +1200 deg C
- 1910400; Power cord EU
- 1910402; Power cord UK

P/N: 48201-1201

© 2019, FLIR Systems, Inc.

#48201-1201; r. 35207; en-US

- 1910401; Power cord US
- T911803; Power supply, 24 VDC, 2 A, 50 W
- T910922; Power supply, incl. multi plugs, for A3xx, A3xxsc, A6xx and A6xxsc
- T951004ACC; Ethernet cable CAT6, 2 m/6.6 ft.
- T911307ACC; Ethernet cable, CAT6, 2 m/6.6 ft, 1 screw connector
- 1910586ACC; Power cable, pigtailed
- 908929; Video cable, 3.0 m/9.8 ft.
- T197870ACC; Cardboard box for FLIR A3xx/A6xx series
- T197871ACC; Hard transport case for FLIR A3xx/A6xx series
- T197214; Close-up 2× (50 µm) incl. case
- T197215; Close-up 4× (100 µm) incl. case
- T300243; FLIR Thermal Studio Pro, 1 Year Subscription
- T300083; FLIR Thermal Studio Pro, Perpetual license
- T300258; FLIR Thermal Studio, Perpetual license
- T198584; FLIR Tools
- T198583; FLIR Tools+ (download card incl. license key)
- APP-10002; FLIR Tools Mobile (Android Application)
- T198697; FLIR ResearchIR Max + HSDR 4 (hardware sec. dev.)
- T199014; FLIR ResearchIR Max + HSDR 4 (printed license key)
- T199044; FLIR ResearchIR Max + HSDR 4 Upgrade (printed license key)
- T198696; FLIR ResearchIR Max 4 (hardware sec. dev.)
- T199013; FLIR ResearchIR Max 4 (printed license key)
- T199043; FLIR ResearchIR Max 4 Upgrade (printed license key)
- T198731; FLIR ResearchIR Standard 4 (hardware sec. dev.)
- T199012; FLIR ResearchIR Standard 4 (printed license key)
- T199042; FLIR ResearchIR Standard 4 Upgrade (printed license key)
- 4220499; FLIR Research Studio - 1 Year Subscription (online activation)
- 4220500; FLIR Research Studio - Perpetual License (online activation)
- 4220646; FLIR Research Studio - Perpetual License (USB dongle)
- T198567; ThermoVision™ System Developers Kit Ver. 2.6
- T198566; ThermoVision™ LabVIEW® Digital Toolkit Ver. 3.3
- INST-EW-0150; Extended Warranty 1 Year for A3xx, T4xx mkII
- INST-EWGM-0155; Premium Service Package for A3xx, T4xx mkII, T530
- INST-GM-0145; General Maintenance Package for A3xx, T3/4xx

Per maggiori informazioni contattare:

INPROTEC IRT
INPROTEC IRT S.r.l.





Via Bizet, 24 20092 Cinisello Balsamo (MI)

Tel. 02 - 66.59.59.77


e-mail: infrared@inprotec-irt.it

web: www.inprotec-irt.it

Camera with built-in IR lens f=18 mm (25°)

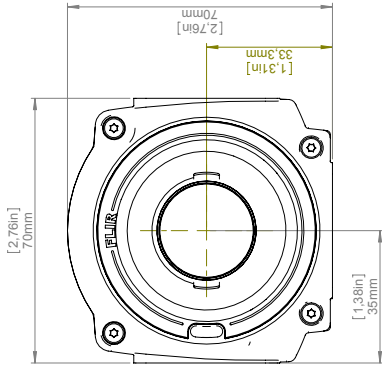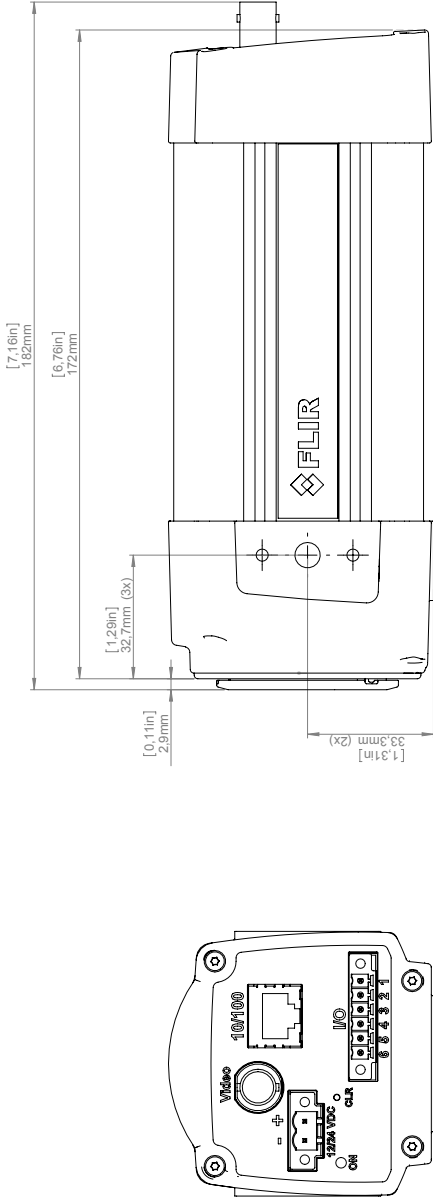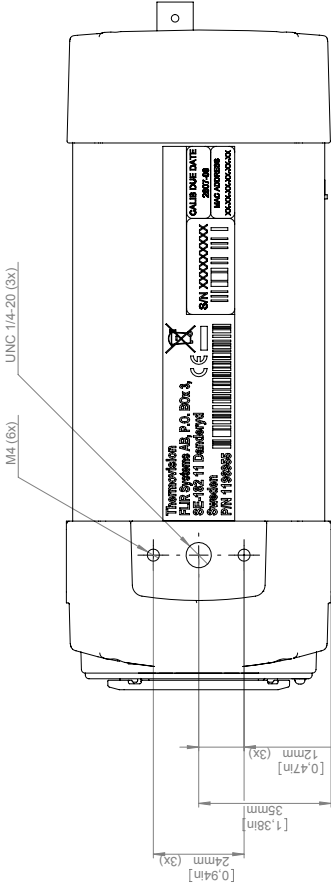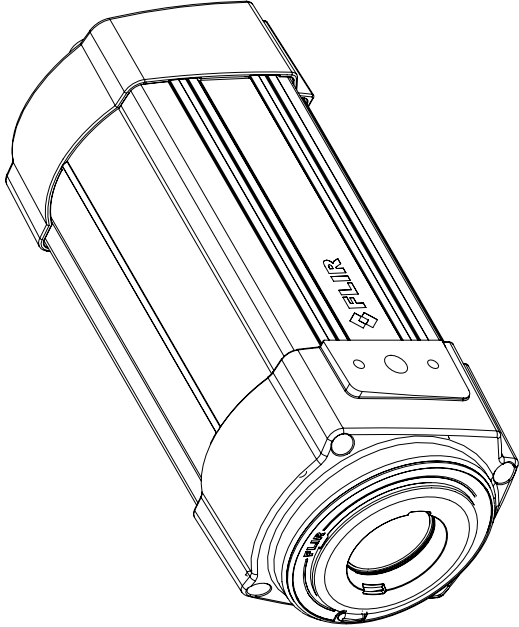

Camera with Lens IR f=4 mm (90°) incl support

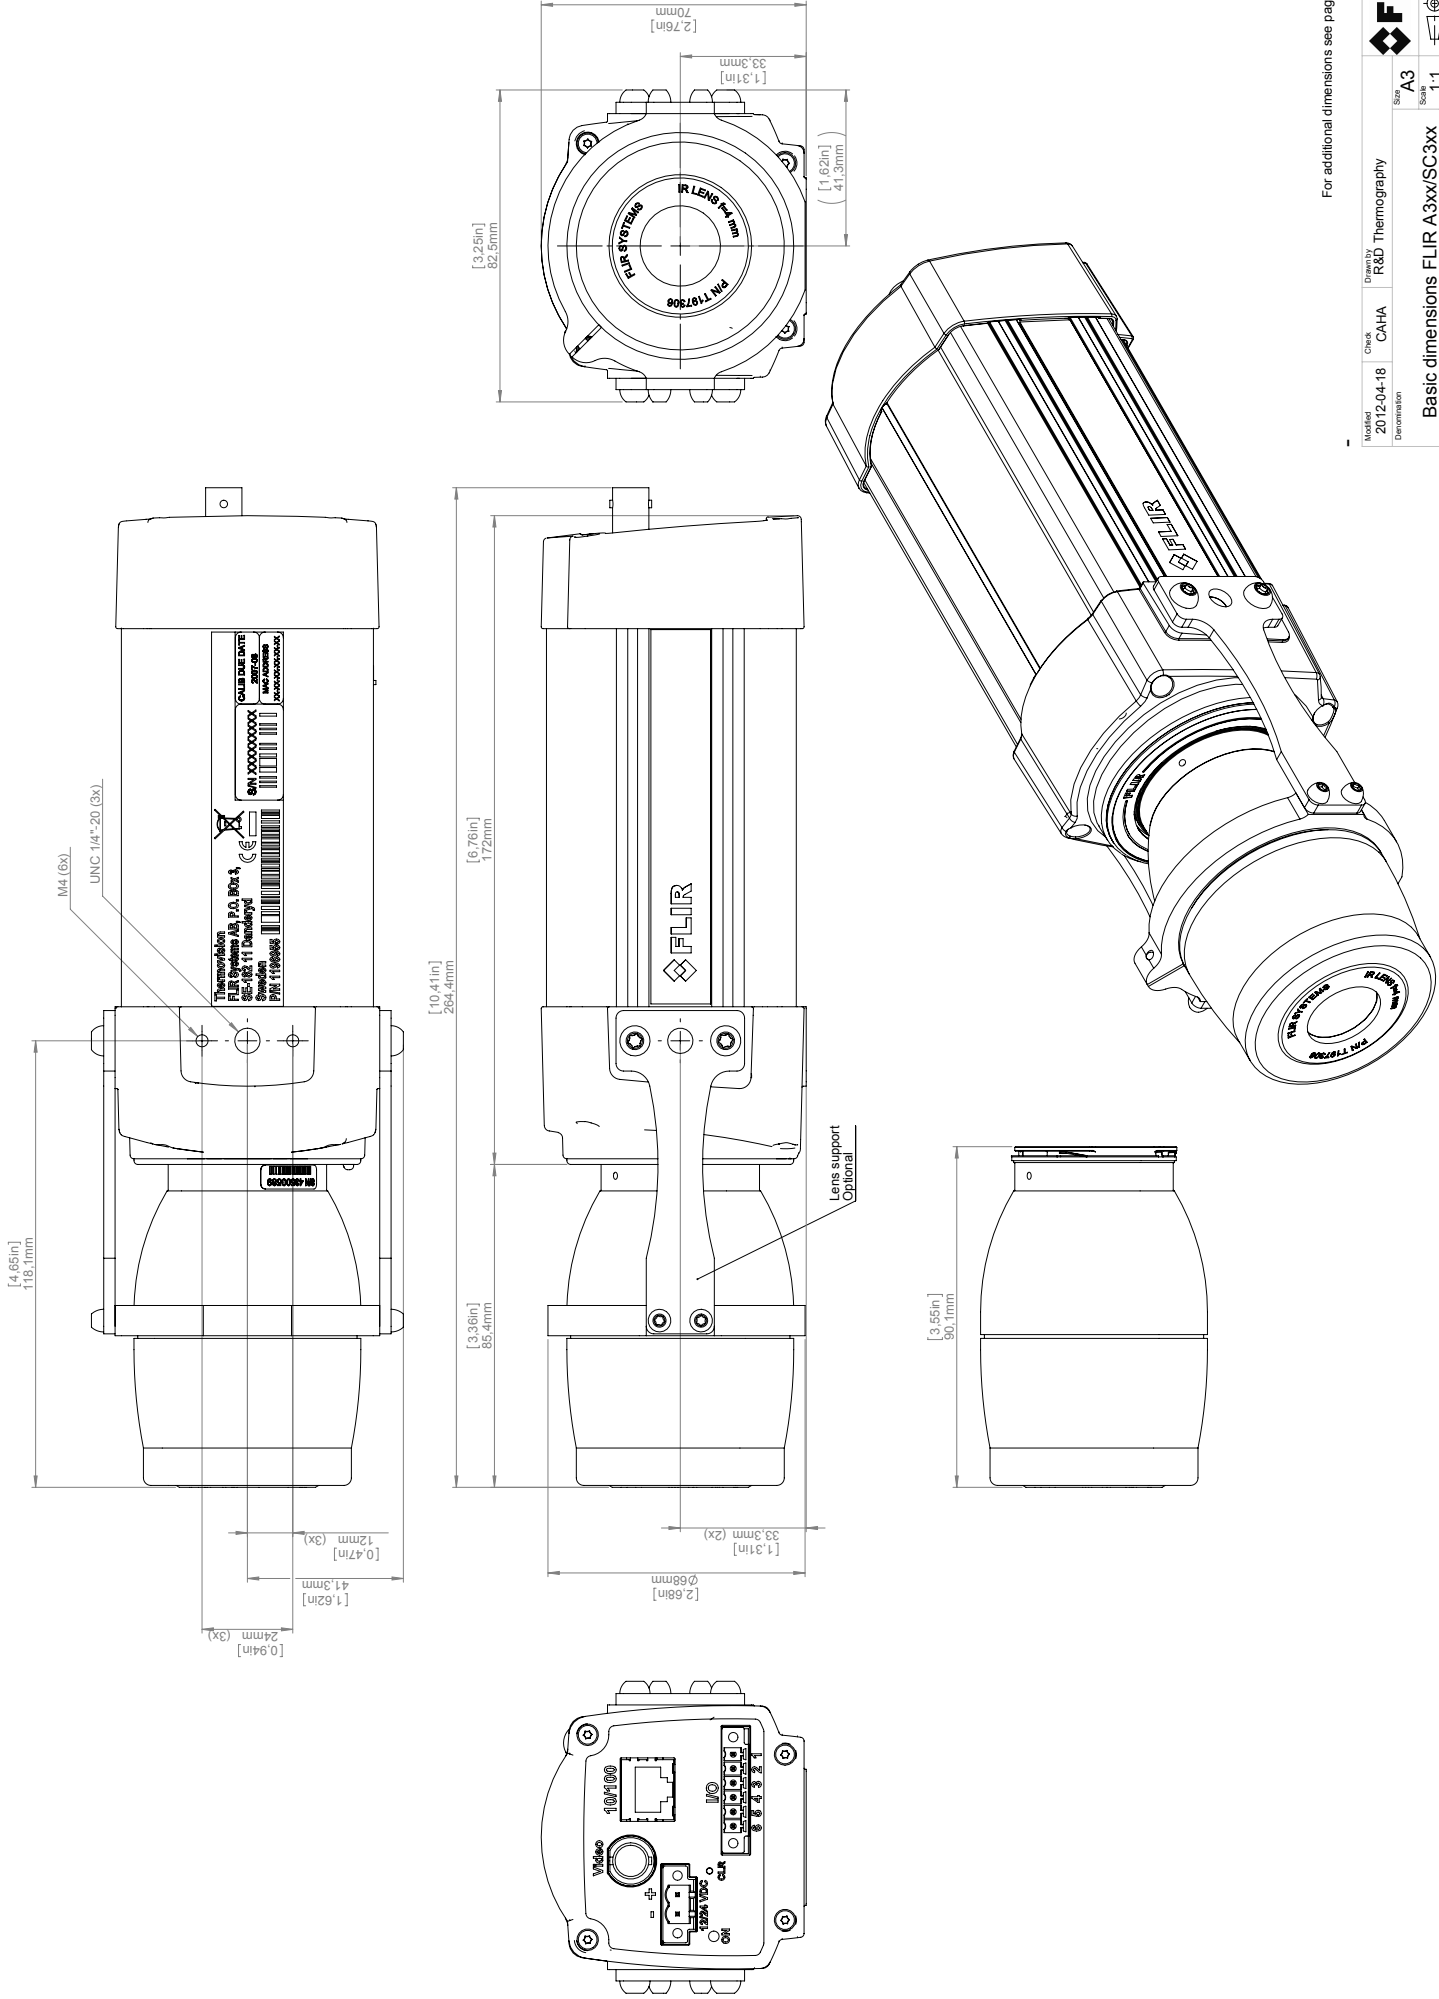

For additional dimensions see page 1

Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography	Size A3	Scale 1:1	Sheet 2(8)	Size A
Basic dimensions FLIR A3xx/SC3xx			Drawing No. T125002			Size A



Camera with Lens IR f=10 mm (45°)

The drawing includes the following views and dimensions:

- Front View:** Shows the camera body with a lens diameter of $\phi 47\text{mm}$ [1.85in]. The mounting flange has a diameter of 33.3mm [1.31in] with two mounting holes. The overall width is 70mm [2.76in] and the height is 35mm [1.38in]. The lens is labeled "FLIR" and "IR LENS 10 mm".
- Side View:** Shows the camera's profile with a total length of 213mm [8.37in]. The mounting bracket has a height of 34mm [1.33in] and a width of 171mm [6.75in]. The camera body has a width of 33.3mm [1.31in] and a height of 35mm [1.38in].
- Rear View:** Shows the back of the camera with a video output (10/100), a power input (24V 1000mA), and an I/O port. The mounting flange has a diameter of 33.3mm [1.31in] with two mounting holes. The overall width is 70mm [2.76in] and the height is 35mm [1.38in].
- Top View:** Shows the camera from above with a lens diameter of $\phi 47\text{mm}$ [1.85in]. The mounting flange has a diameter of 33.3mm [1.31in] with two mounting holes. The overall width is 70mm [2.76in] and the height is 35mm [1.38in].
- Bottom View:** Shows the camera from below with a lens diameter of $\phi 47\text{mm}$ [1.85in]. The mounting flange has a diameter of 33.3mm [1.31in] with two mounting holes. The overall width is 70mm [2.76in] and the height is 35mm [1.38in].
- Mounting Bracket:** Shows the mounting bracket with a lens diameter of $\phi 47\text{mm}$ [1.85in]. The mounting flange has a diameter of 33.3mm [1.31in] with two mounting holes. The overall width is 70mm [2.76in] and the height is 35mm [1.38in].

For additional dimensions see page 1

Model	Check	Drawn by	Decomposition
2012-04-18	CAHA	R&D Thermography	

FLIR A3xx/SC3xx

Basic dimensions FLIR A3xx/SC3xx

Sheet 3(6)

Scale 1:1

Drawing No. T125002






Modified 2012-04-18	Crack CAHA	Drawn by R&D Thermography	Size A3	
Basic dimensions FLIR A3xx/SC3xx			Scale 1:1 	Sheet 3(6) 
-			Drawing No. T125002	Size A

Basic dimensions FLIR A3xx/SC3xx

Drawing No. **T125002**
Size **A**

© 2012 FLR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLR Systems, Inc. Specifications subject to change without further notice. Dimensions are based on nominal values. Products may be subject to regional market considerations. License procedures may apply; please refer to exportquestions@flr.com for any questions. Division conforms to US law as prohibited.







Camera with Lens IR f=30 mm (15°)

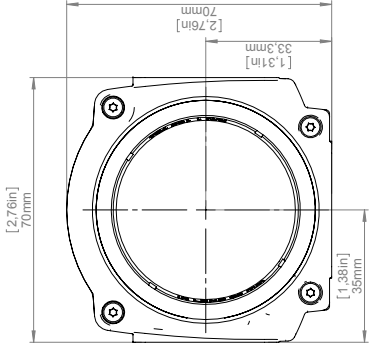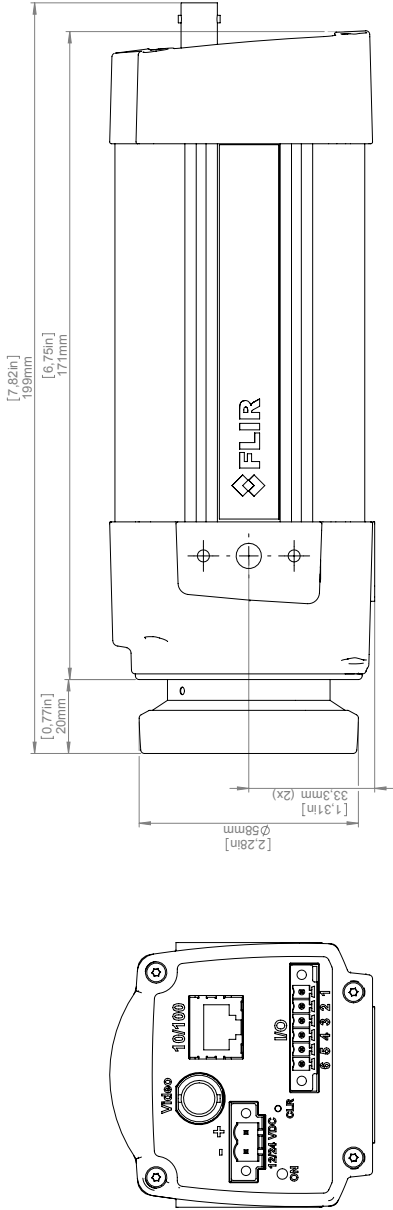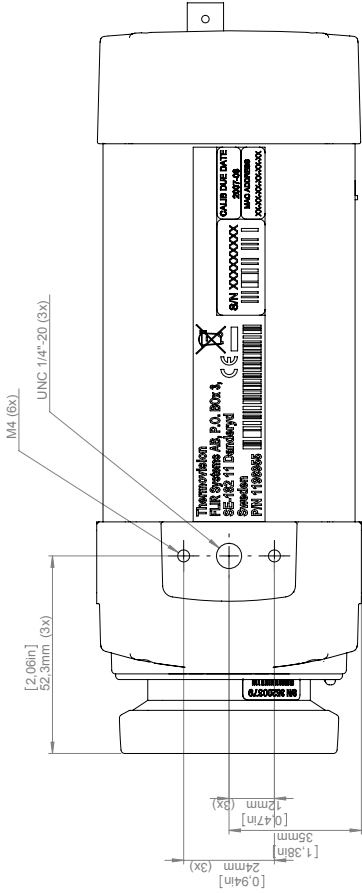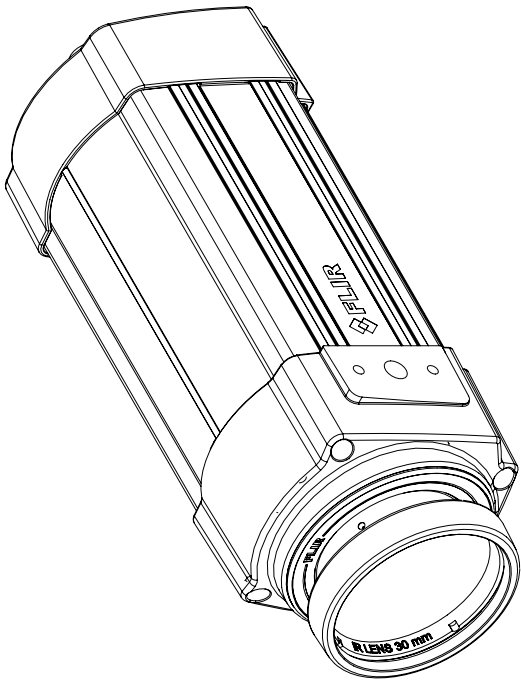

For additional dimensions see page 1

Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography	Size A3	Scale 1:1	Sheet 4(8)	Size A
Basic dimensions FLIR A3xx/SC3xx						
Drawing No. T125002						







Camera with Lens IR f=76 mm (6°) incl support

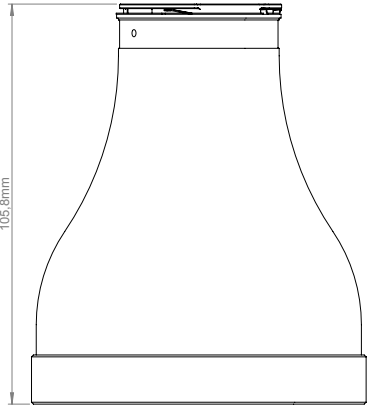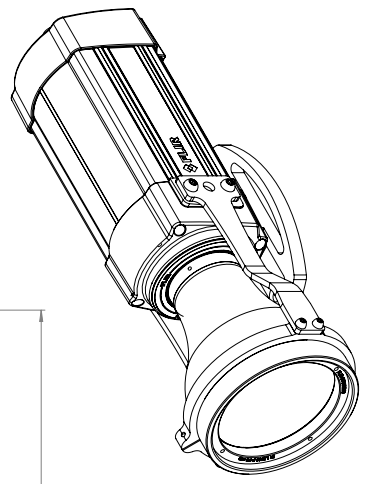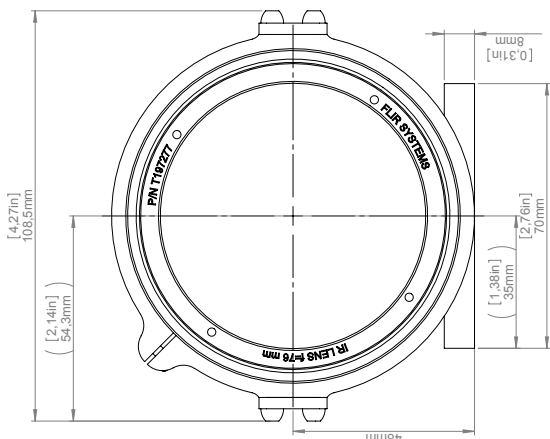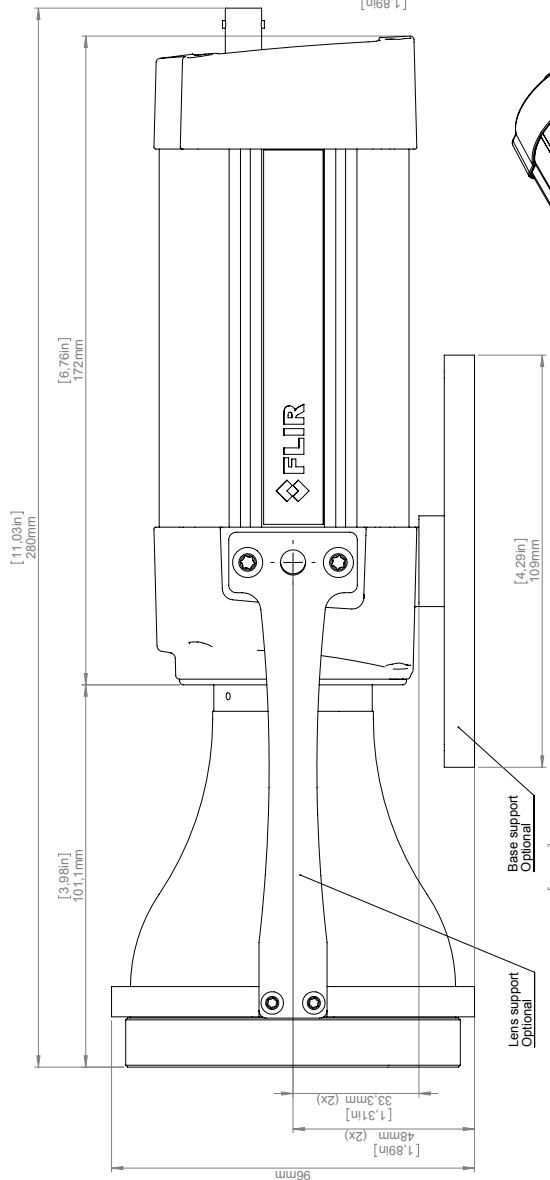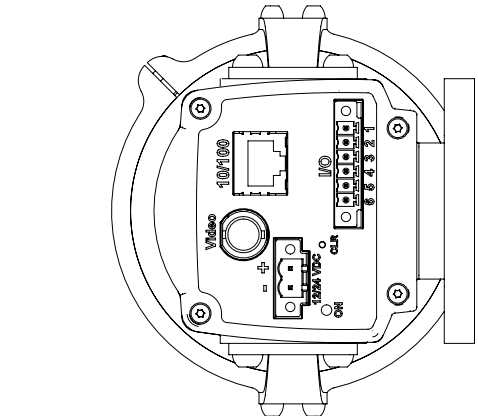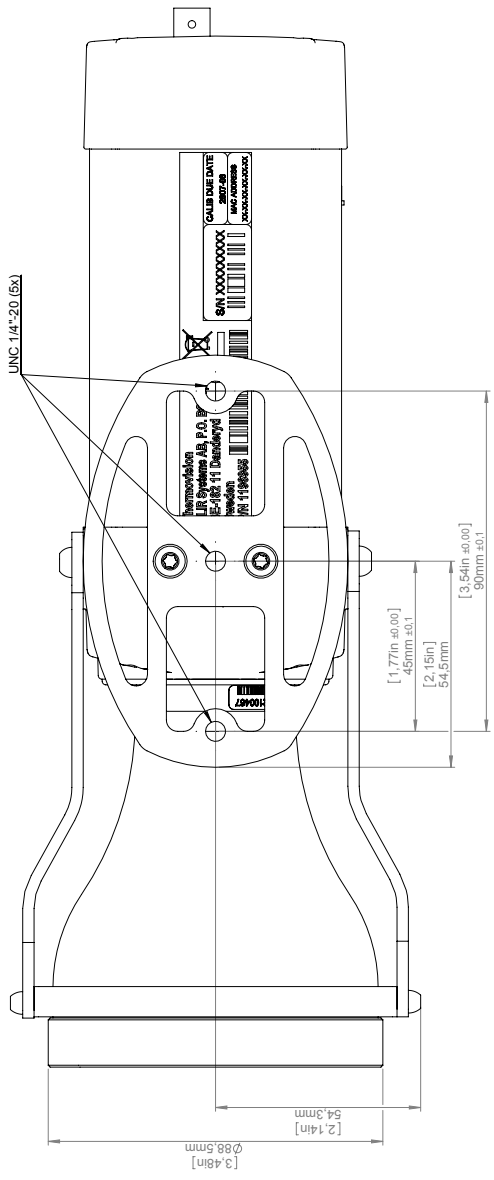

For additional dimensions see page 1

Modified	2012-04-18	Check	CAHA	Drawing	R&D Thermography	Size	A3	Scale	1:1	Sheet	5(8)	Size	A
Basic dimensions FLIR A3xx/SC3xx													
-													
FLIR													
T125002													

Camera with Close-up lens 1X (25 µm) incl support

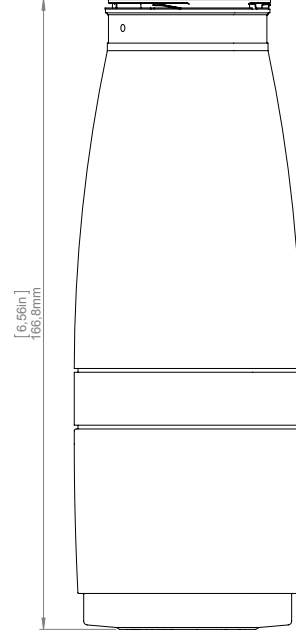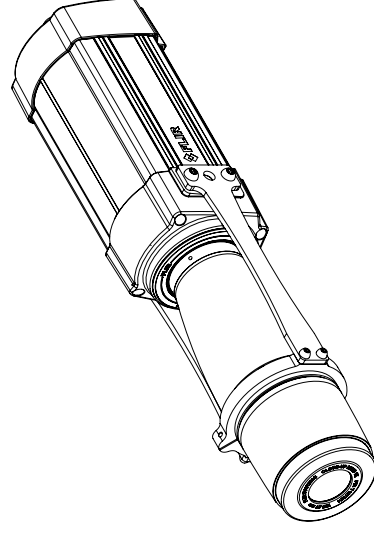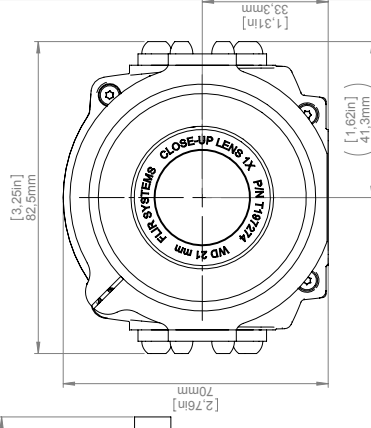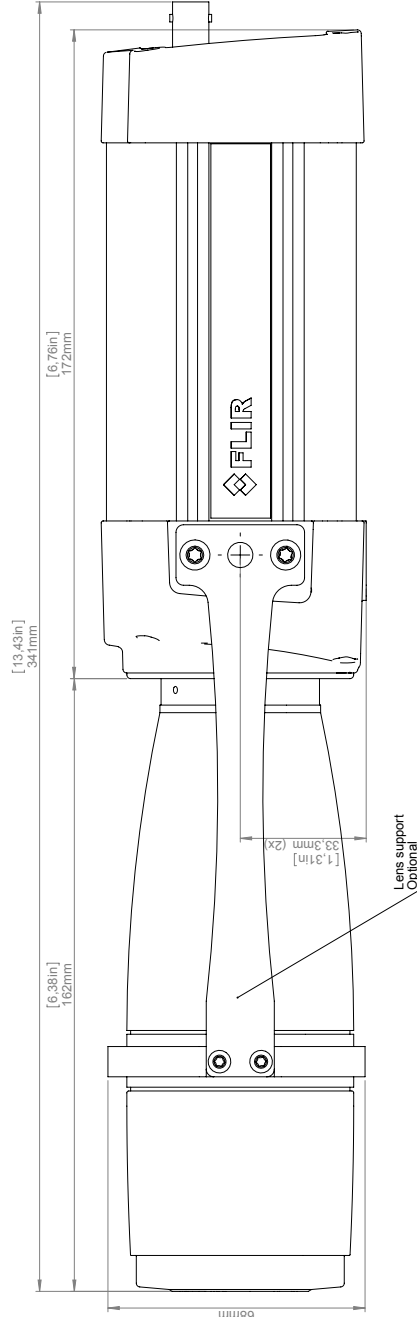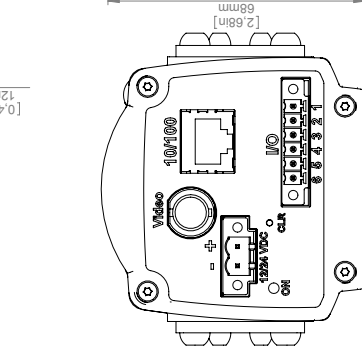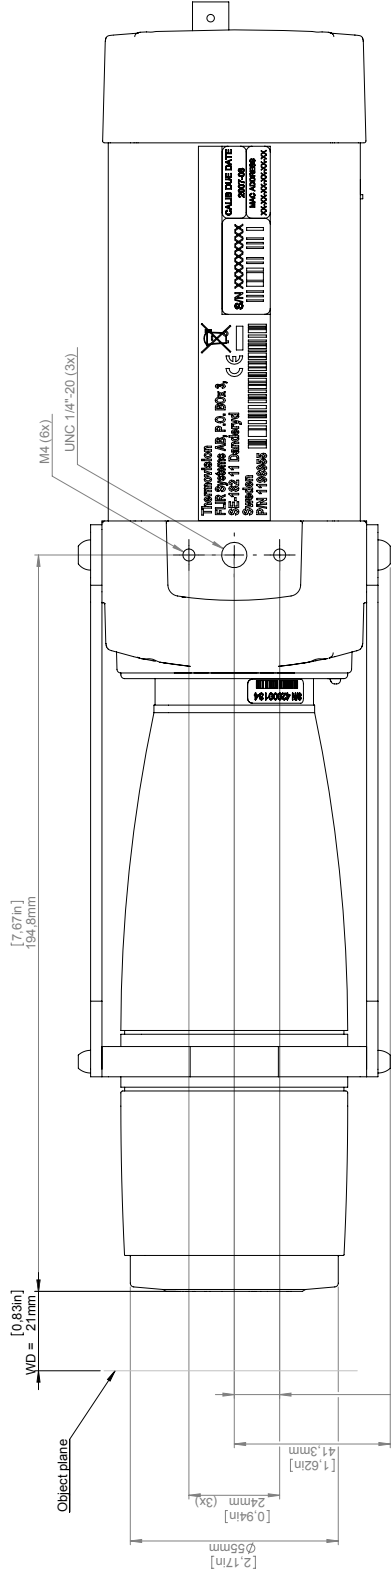

For additional dimensions see page 1

1 2 3 4 5 6 7 8 9 10

A B C D E F G H

Camera with Close-up lens 2X (50 µm)

Front View Dimensions:

- WD = 33mm mm
- [1.3in]
- [2.49in] 63.2mm (3x)
- M4 (6x)
- UNC 1/4"-20 (3x)
- [0.94in] 24mm (3x)
- [1.38in] 35mm
- [0.47in] 12mm (3x)

Side View Dimensions:

- [8.25in] 209.5mm
- [6.76in] 172mm
- [1.2in] 30.5mm
- [3.31in] 85mm
- [1.31in] 33.3mm (2x)

Top View Dimensions:

- [2.76in] 70mm
- [1.31in] 33.3mm
- [2.76in] 70mm
- WD 33 mm
- FLIR SYSTEMS
- PHN 1107200
- CLOSE-UP LENS 2X
- [1.38in] 35mm

Bottom View Dimensions:

- [1.39in] 35.2mm

Labels and Markings:

- FLIR
- FLIR SYSTEMS AB, P.O. Box 1, 805-02 11 Danderyd, Sweden, PHN 1104000
- CE
- CAUTION DUE DATE
- SIN XXXXXXXXX
- MAC ADDRESS
- XXXXXXXXXXXX

For additional dimensions see page 1

Modified	Check	Drawn by	Decommission
2012-04-18	CAHA	R&D Thermography	

FLIR

A3

1:1

Sheet 7(8)

T125002

Basic dimensions FLIR A3xx/SC3xx

Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography	 FLIR	
Discontinuation			Size A3	Scale 1:1
Basic dimensions FLIR A3xx/SC3xx			 Shape 7(6)	 Size A
-			Drawing No. T125002	

Basic dimensions FLIR A3xx/SC3xx

Drawing No. **T125002** Size **A**

© 2012 FLTR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLTR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional/national considerations. License procedures may apply. Product may be subject to US export regulations. Please refer to exportquestions@fltr.com with any questions. Diversion of control to US law is prohibited.

Camera with Close-up lens 4X (100 µm)

For additional dimensions see page 1

© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensions are based on nominal values. Products may be subject to regional market considerations. License procedures may apply.

Modified	Drawn by	Check	Decommission
2012-04-18	CAHA		

FLIR

Basic dimensions FLIR A3xx/SC3xx

Sheet 8(8)

T125002

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

9

10


Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography		
Discontinuation			Size A3	Scale 1:1
Basic dimensions FLIR A3xx/SC3xx			 Shape 8(8)	 Size A
-			Drawing No. T125002	

Basic dimensions FLIR A3xx/SC3xx

Drawing No. **T125002**
Size **A**

© 2012 FLTR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLTR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional/national considerations. License procedures may apply. Product may be subject to US export regulations. Please refer to exportquestions@fltr.com with any questions. Diversion of control to US law is prohibited.

Digital I/O connection diagrams for FLIR A3xx/A6xx series

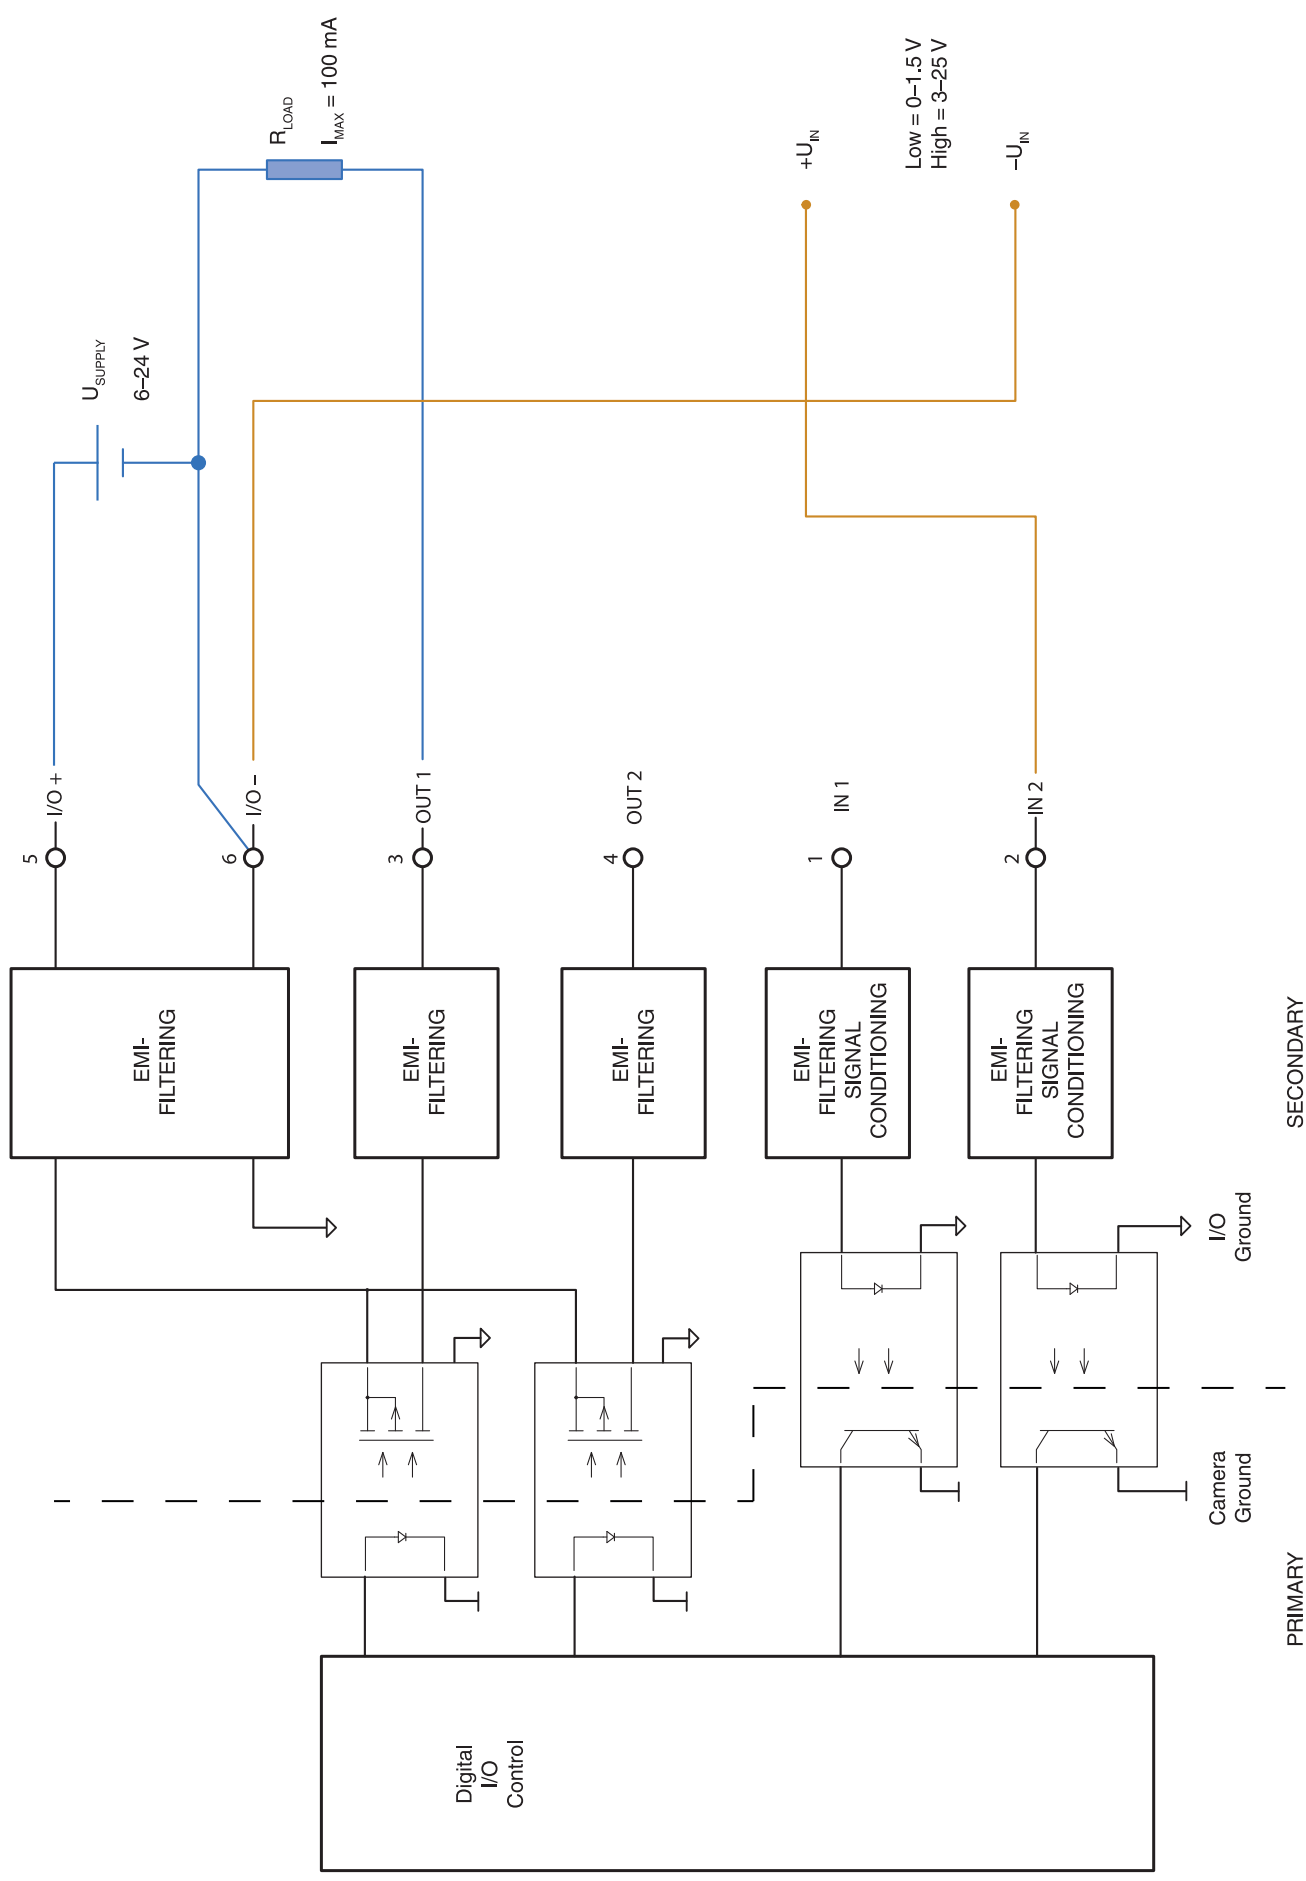



The World's Sixth Sense™

April 24, 2017 Täby, Sweden

AQ320234

CE Declaration of Conformity – EU Declaration of Conformity

Product: FLIR A3XX -series including A3XXSC

Name and address of the manufacturer:

FLIR Systems AB

PO Box 7376

SE-187 15 Täby, Sweden

This declaration of conformity is issued under the sole responsibility of the manufacturer.

The object of the declaration: FLIR A3XX -series including A3XXSC.

The object of the declaration described above is in conformity with the relevant Union harmonisation legislation:

Directives:

Directive	2014/30/EU	Electromagnetic Compatibility
Directive	2014/35/EU	Low Voltage Directive (Power Supply)
Directive	2012/19/EU	Waste electrical and electric equipment

Standards:

Emission:	EN 61000-6-3:2006	Electromagnetic Compatibility Generic standards – Emission
Immunity:	EN 61000-6-2:2005	Electromagnetic Compatibility Generic standards – Immunity
Safety (Power supply):	EN 60950-1	Information technology equipment

FLIR Systems AB

Quality Assurance

Lea Dabiri

Quality Manager